




**Ice dispenser self-contained - Pebble system**  
Daily production up to 105 kg

Hotel  
Restaurant  
Fast food  
Bar  
Disco  
Fish market  
Supermarket  
Medical & SPA  
Industry

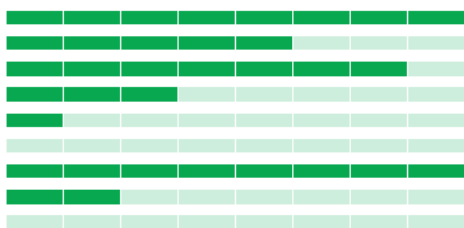

► Position n°




► Features & Plus

- Pebble ice - 91% dry
- 1l (water) - 1kg (ice) - only Air cooled
- AISI 304 SS Scotch Brite finish
- Tropical class +43°C
- AISI 304 SS evaporator
- Air cooling system
- HCFC-Free insulated storage
- Dust-proof water basin
- RoHS Free
- Electromechanical operation
- Automatic water charge
- Standard voltages
- HFC Free



360° innovative design



Removable and cleanable basin




Hidden cables to exalt the aesthetics



Spokes with harmonic proportions

► Available pebble size

drawing for reference only



► Prod. 24h

°C	Air temp.		Water temp.		kg	lbs
	10° C	50° F	7° C	45° F	105	231
	21° C	70° F	15° C	60° F	90	198

**2 Years Warranty**  
subject to limitations

► Certifications available for this model






Ice Pebbles

BSF



## Ice dispenser self-contained - Pebble system Daily production up to 105 kg

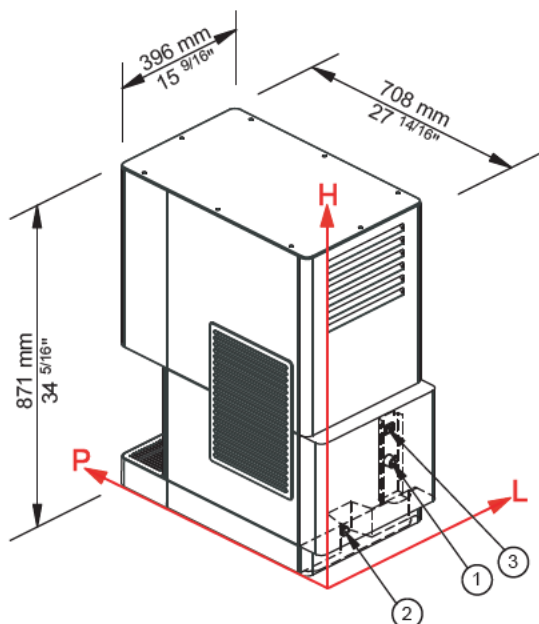

### ► Working conditions

- Location: Indoor

	Min	Max
Ambient temperature	+10° C / +50° F	+43° C / 110° F
Water temperature	+3° C / +37° F	+32° C / +90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

### ► Performances

		Water temperature					
		7° C	45° F	15° C	60° F	21° C	70° F
		10° C	50° F	21° C	70° F	32° C	90° F
Air temperature	10° C	105 kg					
	50° F		231 lbs				
	21° C			90 kg			
	70° F				198 lbs		
	32° C					80 kg	
	90° F						176 lbs

### ► Connections \*

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water in.: 317 mm / 12 8/16" - 173,5 mm / 6 13/16" - 3/4"      ② Water out.: 195 mm / 15 16/16" - 19,5 mm / 12/16 - 24 mm / 15/16"
- ③ Electrical connections: 317 mm / 12 8/16" - 261 mm / 10 4/16"

\* Consult the user manual to correctly position the connection inside the specific panel and respect the design of the dispenser

### ► Technical information

Production in 24h	90 kg / 198 lbs
Storage capacity, up to	5 kg / 11 lbs
Cooling system	A
Approximate pebble size	8 x 16 x 7
Refrigerant	R290
Standard voltage	220-240 V ~ 50 Hz
Average power consumption	440 W
Fuse	10 A
Delivered ice	50 g/sec

Water consumption	A: 1 l/kg - 12,0 gal/100 lbs
Sizes (L-P-H mm)	396 - 708 - 871
(L-P-H in)	15 9/16 - 27 14/16 - 34 5/16
Sizes with pack (L-P-H mm)	440 - 780 - 1040
(L-P-H in)	18 5/16 - 30 5/16 - 40 15/16
Net weight	61 kg / 157 lbs
Gross weight	70 kg / 177 lbs
Finish	AISI 304 stainless steel, scotch brite

All the technical information must be considered at the following conditions:

Ambient temperature +21° C

Water temperature +15° C

Electrical consumption at +32° C (standard voltage)

Average power consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice

Rev. 00 - Issued March 2021



[www.bremaice.it](http://www.bremaice.it)  
info@bremaicegroup.it

We are Brema

