


IC 18



Self-contained ice maker - Sprayer system Daily production up to 25 kg

Hotel Restaurant Fast food Bar Disco Fish market Supermarket Medical & SPA Industry



► Position n°

► Features & Plus

- · Compact and crystal cube
- AISI 304 SS Scotch Brite finish
- Tropical class +43°C
- · Cleanable antiscale filter
- Easy cleanable internal rounded surfaces
- HCFC-Free insulated storage
- RoHS Free
- Disappearing insulated door
- Electromechanical operation
- ON-OFF rocker switch
- · Standard and special voltages
- · Patented sprayer slide
- · Suitable for embedment





AISI 304 SS Scotch Brite finish



Cleanable antiscale



Disappearing insulated



Patented sprayer slide

► Available ice cube size





► Prod. 24h

	Air t	emp.	Water	temp.	kg	lbs
,	10° C	50° F	7° C	45° F	25	55
•	21° C	70° F	15° C	60° F	22	49

2 Years Warranty subject to limitations

► Certifications available for this model



















www.bremagroup.it info@bremaicegroup.it






IC 18



Self-contained ice maker - Sprayer system Daily production up to 25 kg

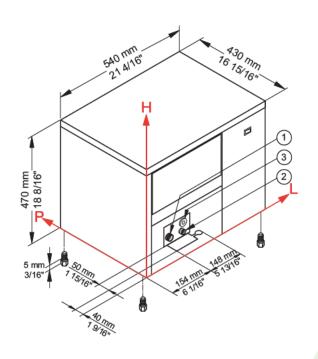

► Working conditions

• Location: Indoor

	Min	Max
Ambient temperature	+10° C / +50° F	+43° C / 110° F
Water temperature	+3° C / +37° F	+32° C / +90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

▶ Performances

		•		Wa	ater ten	nperatu	ıre	
		•	7° C	45° F	15° C	60° F	21° C	70° F
	Ф	10° C	25 kg					
	tur	50° F		55 lbs				
	era	21° C			22 kg			
	Air temperature	70° F				49 lbs		
		32° C					18 kg	
	٩	90° F						40 lbs

▶ Connections

All measures are referred to the rear bottom-left corner

- 1 Water in.: 3/4" Ø
- ③ Electrical connections

② Water out.: 24 mm / 15/16" Ø

► Technical information

Production in 24h	22 kg / 49 lbs		
Store capacity, up to	4 kg / 9 lbs		
Cooling system	Α		
Kind of cube	D-13g		
Refrigerant	R452A		
Standard voltage	220-240 V ~ 50 Hz		
Average power consumption	320 W		
Fuse	10 A		

Water consum	ption	A: 4,5 l/kg - 53,9 gal/100 lbs		
Sizes (L-P-H m	nm)	540 - 430 - 470		
(L-P-H in)	21 4/16 - 16 15/16 - 18 8/16		
Sizes with pac	k (L-P-H mm)	590 - 490 - 640		
	(L-P-H in)	23 4/16 - 19 5/16 - 25 3/16		
Net weight		34 kg / 75 lbs		
Gross weight		39 kg / 86 lbs		
Finish	AISI 304 stainless steel, scotch brite			

All the technical information must be considered at the following conditions: Sizes without feet Standard Cube (13 g)
Ambient temperature +21° C
Water temperature +15° C

Models and specifications are subject to change without notice

Average power consumption at +43° C (standard voltage)

Rev. 03 - Issued January 2025



